


표준소비효율(고효율) 배전용 변압기 Distribution Transformer

Ratings

Phase : Three, Single
Frequency: 50Hz, 60Hz
High Voltage: 22.9kV, 6.6kV, 3.3kV
Low Voltage: 220, 380, 440, 480, 220Y/127, 380Y/220, 400Y/230, 440Y/254, 480Y/277
Vector: Dd0, Dyn11, etc

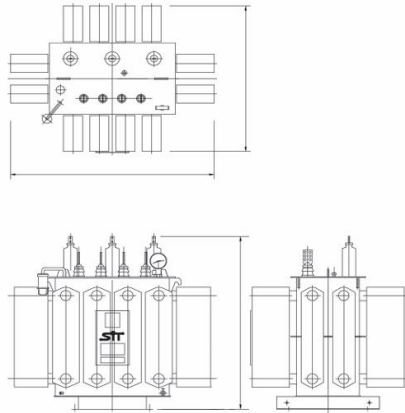

최저소비효율 (22900V - LV)

Capacity (Kva)	ξ (%)	ϵ (%)	I_o (%)	Dimensions(mm)			OIL (ℓ)	weight (kg)
				W	D	H		
1250	99.40	1.3	3.5	2020	1750	1840	300	990
1500	99.45	1.3	3.5	2020	1750	2000	370	1240
2000	99.45	1.3	3.5	2210	2000	2000	395	1350
2500	99.50	1.2	3.0	2280	2030	2120	440	1550
3000	99.50	1.2	3.0	2340	2050	2230	470	1650

최저소비효율 (6600V ~ 3300V - LV)

Capacity (Kva)	ξ (%)	ϵ (%)	I_o (%)	Dimensions(mm)			OIL (ℓ)	weight (kg)
				W	D	H		
1250	99.40	1.3	3.5	2020	1750	1840	300	990
1500	99.45	1.3	3.5	2020	1750	2000	370	1240
2000	99.45	1.3	3.5	2210	2000	2000	395	1350
2500	99.50	1.2	3.0	2280	2030	2120	440	1550
3000	99.50	1.2	3.0	2340	2050	2230	470	1650