

## Pole-mounted Transformer


### Ratings

Frequency: 60Hz, 50Hz

High Voltage: 34.5kV and Below

Low Voltage: 240/120V, 480/240V, 277V

Capacity: 10kVA Through 333kVA

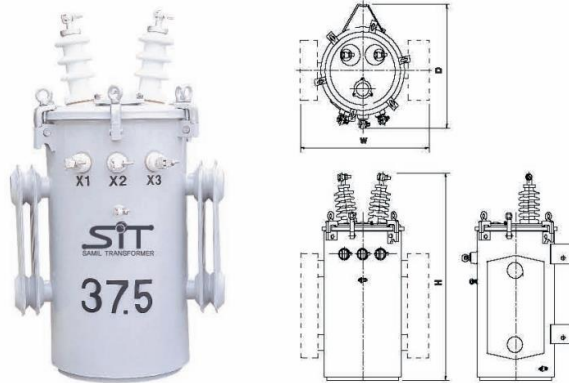

### Characteristics & Dimensions

13200Grdy/7620V-240/120V, 480/240V

Capacity (Kva)	$\xi$ (%)	$\epsilon$ (%)	Core Loss Watt	Copper Loss Watt	Io (%)	Dimensions(mm)			OIL (ℓ)	weight (kg)	Poarity
						W	D	H			
10	98.3	1.3	36	120	1.3	460	590	970	46	140	Additive
15	98.3	1.4	50	195	1.3	470	600	980	50	150	Additive
25	98.5	1.3	80	290	1.2	500	630	1020	60	195	Additive
37.5	98.7	1.1	105	360	1.2	550	680	1060	79	250	Additive
50	98.7	1.1	135	500	1.1	570	690	1080	85	280	Additive
75	98.8	1.0	190	650	1.1	640	700	1150	95	350	Additive
100	98.9	1.0	210	850	1.0	670	730	1160	106	400	Additive
167	98.8	1.0	350	1410	0.8	750	870	1200	130	510	Additive
250	98.9	1.0	500	2000	0.8	820	945	1280	200	690	Subtractive
333	98.7	1.1	650	3500	0.8	870	1000	1310	230	820	Subtractive

### Characteristics & Dimensions

13200V-240/120V, 480/240V

Capacity (Kva)	$\xi$ (%)	$\epsilon$ (%)	Core Loss Watt	Copper Loss Watt	Io (%)	Dimensions(mm)			OIL (ℓ)	weight (kg)	Poarity
						W	D	H			
10	98.3	1.3	36	120	1.3	460	590	1030	46	140	Subtractive
15	98.3	1.4	50	195	1.3	470	470	1040	50	150	Subtractive
25	98.5	1.3	80	290	1.2	500	500	1080	60	195	Subtractive
37.5	98.7	1.1	105	360	1.2	550	550	1120	79	250	Subtractive
50	98.7	1.1	135	500	1.1	570	570	1140	85	280	Subtractive
75	98.8	1.0	190	650	1.1	640	640	1210	95	350	Subtractive
100	98.9	1.0	210	850	1.0	670	670	1160	106	400	Subtractive
167	98.8	1.0	350	1410	0.8	750	750	1260	130	510	Subtractive
250	98.9	1.0	500	2000	0.8	820	820	1340	200	690	Subtractive
333	98.7	1.1	650	3500	0.8	870	870	1370	230	820	Subtractive