
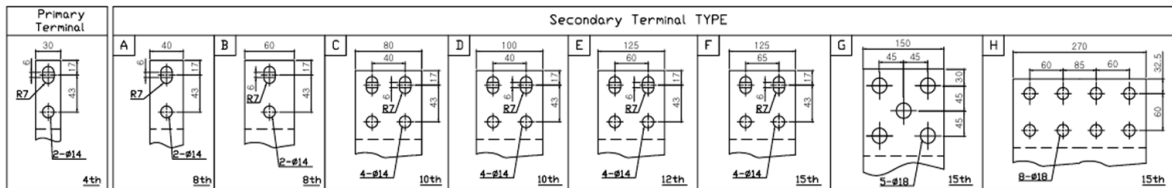
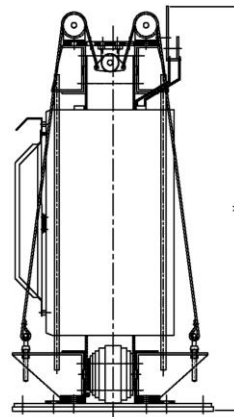
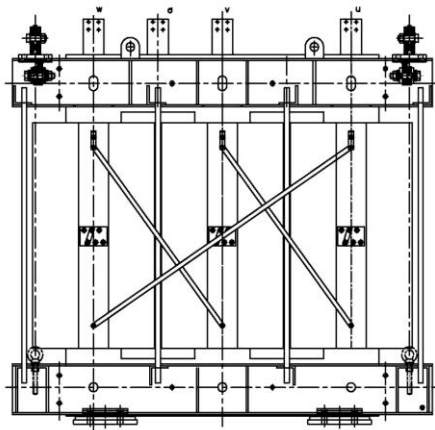


SPECIFICATION [SMCA(SMBA)-3S] [Earthquake-resistant Mold Transformer]

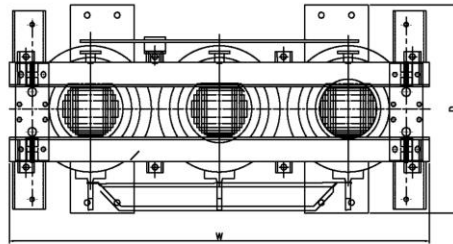

3P 6.6(3.3)kV/380-220V

Capacity	Efficiency (Load Rate)		No load current	Voltage fluctuation rate	External dimensions(mm)			Weight	LV terminal	
(kVA)	50%	100%	(%)	(%)	W	D	H	(KG)	T * W	Type
100	98.90	98.6	1.5	1.6	1180	750	1080	750	8t*40	A
200	99.00	98.7	1.4	1.5	1360	750	1130	1120	8t*40	A
300	99.10	98.7	1.4	1.4	1360	750	1160	1200	8t*40	A
400	99.20	98.7	1.3	1.4	1500	800	1380	1460	8t*60	B
500	99.30	98.9	1.2	1.3	1500	800	1380	1650	8t*60	B
600	99.30	99.0	1.2	1.2	1580	800	1410	1900	10t*80	C
750	99.30	99.1	1.0	1.2	1620	800	1570	2200	10t*100	D
1000	99.40	99.1	1.0	1.1	1720	860	1660	2750	12t*125	E
1250	99.50	99.2	1.0	1.0	1840	900	1750	3200	12t*125	E
1500	99.50	99.3	1.0	1.0	2220	1000	1960	5200	15t*150	G
2000	99.50	99.3	1.0	1.0	2420	1000	2000	5700	15t*150	G

* The above excess capacity and unwritten SPEC. can also be manufactured by order.