

주상 변압기 Pole-mounted Transformer


Ratings

Frequency: 60Hz, 50Hz

High Voltage: 20kV and Below

Low Voltage: 240/120V, 480/240V, 277V

Capacity: 10kVA Through 333kVA

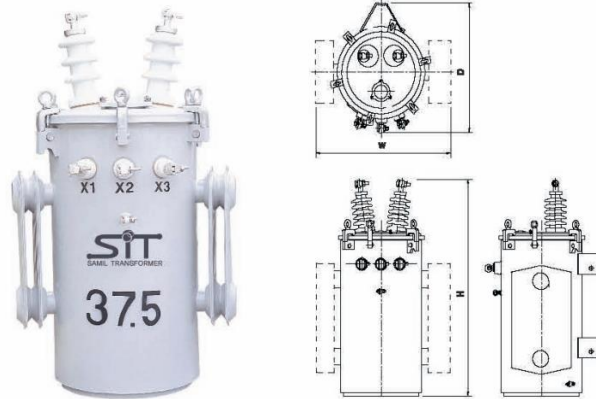

Single phase 7620/ 13200V

Capacity (Kva)	ξ (%)	ϵ (%)	Core Loss Watt	Copper Loss Watt	I _o (%)	Dimensions(mm)			OIL (ℓ)	weight (kg)
						W	D	H		
10	97.8	2.2	45	180	1.3	440	520	940	30	100
15	98.2	1.8	58	220	1.3	450	540	970	30	130
25	98	1.8	78	430	1.2	500	570	980	40	180
30	98.1	1.7	90	480	1.2	510	590	990	40	200
37.5	98.3	1.6	110	520	1.2	520	600	1000	45	220
50	98.5	1.5	130	650	1.1	540	630	1060	55	280
75	98.5	1.4	180	950	1.0	590	670	1100	60	380
100	98.5	1.4	250	1240	1.0	680	680	1120	60	450
167	98.5	1.4	445	2100	1.0	710	800	1190	80	580
250	98.5	1.4	580	3200	4.0	980	950	1350	215	980
333	98.6	1.3	700	4000	3.5	1040	960	1400	240	1100